




Description

- . Elegant design desk & floor light
- . easy and flexible installing
- . White & Black finish available
- . Efficiency >125LM/W
- . Glare-free (UGR<16) and uniform light
- . CCT tunable with Touch Screen / daylight and motion sensor
- . HCL (human centric lighting)
- . Fast installation (<5 minutes)
- . 3 SDCM Consistency
- . L90 B10 Performance / 50000 hrs




White version

RAL reference: 9016

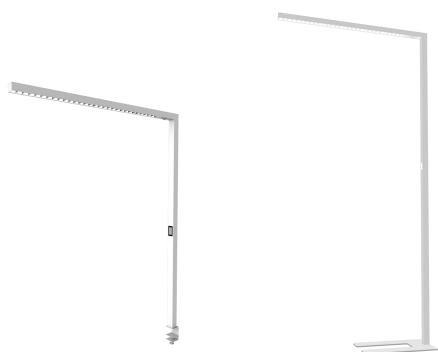


Black version

RAL reference: 9005

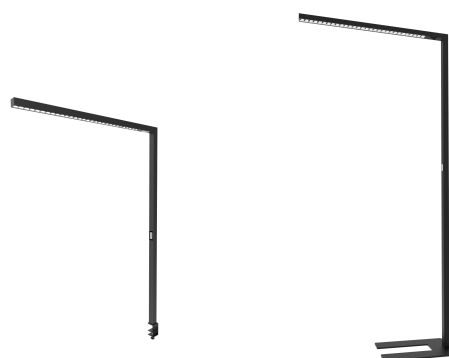

Product information
WS18619102D 60W

Installation	Clap tightness
Material	Aluminum + Metal
Finish	Black / White
Size	L1100*H1200mm
Input Voltage	AC 220-240V
System power:	60W
LED lumen output (lm):	125lm/W (5000lm↑+2500lm↓)
LED efficiency (lm/W):	125lm/W
UGR	<16
Performance	L90 / B10
Warranty	50000 hrs
Dimmable way	Brightness Dimmable by touch screen CCT & Brightness Dimmable by touch screen CCT & Brightness Dimmable by touch screen + sensor

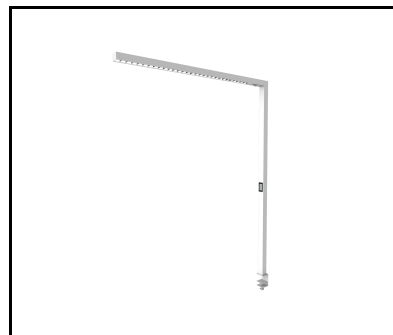


Light Source	SMD
CRI	>90
Consistency	3 SDCM
CCT	3000K/3500K/4000K/3000k~6500K
Protection	IP20 / IK05
Net Weight	4.6 kg/pc
QTY/CTN	1 PC/CTN
Package	135*20*10cm




DATA OF LAMP		PHOTOMETRIC DATA Eff: 124.91 lm/W			
MODEL		I _{max} (cd)	2240	S/MH (C0/180)	1.18
NOMINAL POWER (W)	59.8	LOR (%)	100.0	S/MH (C90/270)	0.79
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	7469.4	η UP, DN (C0-180)	29.6, 14.6
NOMINAL FLUX (lm)	7469.37	CIE CLASS	DIFFUSE	η UP, DN (C180-360)	28.1, 27.6
LAMPS INSIDE	1	η up (%)	57.8	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	221.6	η down (%)	42.2	CIBSE SHR MAX	1.15

Product information
WS18619102F 60W

Installation	Free Standing
Material	Aluminum + Metal
Finish	Black / White
Size	L1100*H2000mm
Input Voltage	AC 220-240V
System power:	60W
LED lumen output (lm):	7500lm
LED efficiency (lm/W):	125lm/W (5000lm↑+2500lm↓)
UGR	<16
Performance	L90 / B10
Warranty	50000 hrs
Dimmable way	Brightness Dimmable by touch screen CCT & Brightness Dimmable by touch screen CCT & Brightness Dimmable by touch screen + sensor

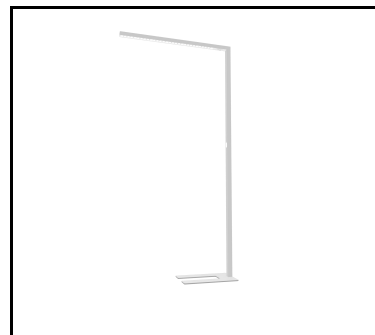

Light Source	SMD
CRI	>90
Consistency	3 SDCM
CCT	3000K/3500K/4000K/3000k~6500K
Protection	IP20 / IK05
Net Weight	12.6 kg/pc
QTY/CTN	1 PC/CTN
Package	Base: 52*32*3cm, 1CTN; Lamp body: 205*20*10cm, 1CTN.

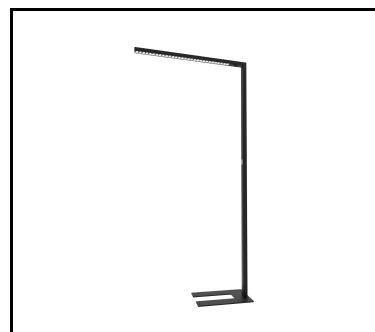

DATA OF LAMP			PHOTOMETRIC DATA			Eff: 124.91 lm/W
MODEL			I _{max} (cd)	2240	S/MH (C0/180)	1.18
NOMINAL POWER (W)	59.8		LOR (%)	100.0	S/MH (C90/270)	0.79
RATED VOLTAGE (V)	220		TOTAL FLUX (lm)	7469.4	η UP, DN (C0-180)	29.6, 14.6
NOMINAL FLUX (lm)	7469.37		CIE CLASS	DIFFUSE	η UP, DN (C180-360)	28.1, 27.6
LAMPS INSIDE	1		η up (%)	57.8	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	221.6		η down (%)	42.2	CIBSE SHR MAX	1.15